


Multi-Mode Outdoor Fiber Optic Cable (48F)

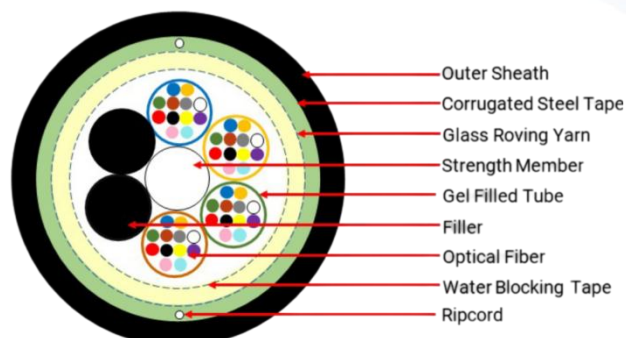

The Outdoor fiber optic cables are PBT Multi loose tube with colored fiber cores. The constructions are of water-blocking gel material with Non-Metallic Central Strength member & ECCS armoring. This cable has an LSZH outer jacket and makes it perfect for outdoor applications

Features

- Complies to ANSI/TIA-568.3-D, Telcordia GR-20, IEC 60794-2, ISO/IEC 11801, ISO/IEC 24702
- ECCS Armoring
- Waterproof layer & excellent moisture resistance provided
- Excellent consistence performance
- Covered under 3C3® Performance Warranty

Constructional Specifications

Fiber Count	: 48F
Fibers per loose Tube	: 12
Fiber colors	: Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink and Aqua
Loose Tube Color	: Blue, Orange, Green, Brown
Loose Tube Diameter	: 2.0±0.02mm
Fillers	: 2
Central Strength Member	: FRP
Diameter of CSM	: 2.0±0.01mm
Water Blocking Material	: Thixotropic Gel
Outer Sheath	: LSZH UV Resistance
Sheath Color	: Black
Nominal Cable diameter	: 12.5±0.5mm
Sheath Thickness	: 2.0mm
Nominal Cable weight	: 145 ±5 kg/km
Drum Length	: 2 Km ± 5 %

Multi-Mode Outdoor Fiber Optic Cable (48F)

Mechanical Specifications

Specification	Value	Test Method
Tensile Strength (Long Term)	: 2500N	IEC-60794-1-E1
Tensile Strength (Short Term)	: 4000N	IEC-60794-1-E1
Bend Radius	: 20D	IEC-60794-1-E11
Kink Radius	: 10D	IEC-60794-1-E11
Crush Resistance (Short)	: 4000N /100mm	IEC-60794-1-E3
Crush Resistance (Long)	: 3000N /100mm	IEC-60794-1-E3
Impact Resistance	: 10 Joule	IEC/EN 60794-1-E4
Torsion Strength	: ± 180 degree	IEC/EN 60794-1-E7

Optical Specifications

Specification	Value	Test Method
Fiber Type	: 50/125 μ m	
Fiber Coating Color	: Colored	
Core non-circularity	: $\leq 6\%$	IEC/EN 60793-1-20
Cladding Diameter	: 125.0 $\pm$ 0.7 μ m	IEC/EN 60793-1-20
Core/cladding Concentricity Error	: $\leq 1.5\mu$ m	IEC/EN 60793-1-20
Cladding non-circularity	: $\leq 1.0\%$	IEC/EN 60793-1-20
Coating Diameter	: 242 $\pm$ 7 μ m	IEC/EN 60793-1-21
Coating/cladding Concentricity Error	: $\leq 12\mu$ m	IEC/EN 60793-1-20
Attenuation Co-efficient	: 850nm $\leq$ 2.5dB/km	IEC/EN 60793-1-40
	: 1300nm $\leq$ 0.8dB/km	IEC/EN 60793-1-40
Effective Modal Bandwidth	: ≥ 4700 MHz.km (OM4)	
	: ≥ 2000 MHz.km (OM3)	
Attenuation inhomogeneity	: ≤ 0.1 dB(500)	
Numerical Aperture	: 0.275 $\pm$ 0.015	

Multi-Mode Outdoor Fiber Optic Cable (48F)

Environmental Specifications

Installation Temperature	:	-10°C~+70°C
Storage Temperature	:	-40°C~+70°C
Operating Temperature	:	-40°C~+70°C

Standard Compliances/Certifications

- RoHS Certified

Ordering Information

Product Code
53C32-0048

Description

High Link Fiber Optic, Armored, Multi-loose Tube Outdoor Cable,
Gel filled, 12F/T, CSM FRP, Single Sheath Black LSZH, MM
C = 2 - OM2, 3 - OM3, 4 - OM4