


Single Mode Outdoor Fiber Optic Cable (24F)

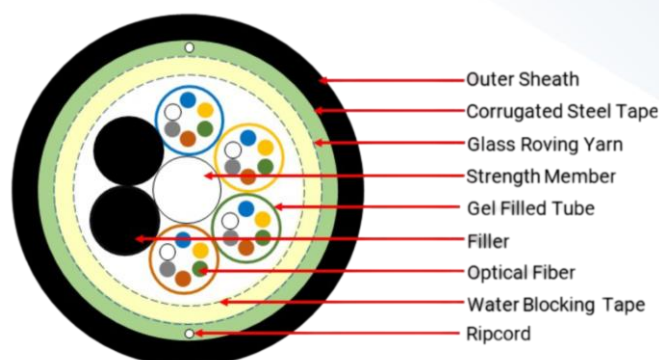

The Outdoor fiber optic cables are PBT Multi loose tube with colored fiber cores. The constructions are of water-blocking gel material with Non-Metallic Central Strength member & ECCS armoring. This cable has HDPE outer jacket which makes it perfect for outdoor applications.

Features

- Complies to ANSI/TIA-568.3-D, ITU-T G652.D, Telcordia GR-20, IEC 60794-2/ 60794-3-10
- HDPE jacket
- UV Protected Outer Sheath
- ECCS Armoring
- Waterproof layer & excellent moisture resistance provided
- Excellent consistent performance
- Covered under 3C3® Performance Warranty

Constructional Specifications

Fiber Count	: 24F
Fibers per loose Tube	: 6F/T
Fiber colors	: Blue, Orange, Green, Brown, Grey, White
Loose Tube Color	: Blue, Orange, Green, Brown
Loose Tube Diameter	: 2.0±0.02mm
Fillers	: 2
Central Strength Member	: FRP
Diameter of CSM	: 2.0±0.01mm
Water Blocking Material	: Thixotropic Gel
Outer Sheath	: HDPE UV Resistance
Sheath Color	: Black
Nominal Cable diameter	: 12.5 ±0.5mm
Sheath Thickness	: 2.00 mm nominal
Nominal Cable weight	: 145 ±5 kg/km
Drum Length	: 2 Km ± 5 %

Single Mode Outdoor Fiber Optic Cable (24F)

Mechanical Specifications

Specification	Value	Test Method
Tensile Strength (Long Term)	: 2500N	IEC-60794-1-E1
Tensile Strength (Short Term)	: 4000N	IEC-60794-1-E1
Bend Radius	: 20D	IEC-60794-1-E11
Kink Radius	: 10D	IEC-60794-1-E11
Crush Resistance (Short)	: 4000N /100mm	IEC-60794-1-E3
Crush Resistance (Long)	: 3000N /100mm	IEC-60794-1-E3
Impact Resistance	: 10 Nm	IEC/EN 60794-1-E4
Torsion Strength	: $\pm 180^\circ$	IEC/EN 60794-1-E7

Optical Specifications

Specification	Value	Test Method
Fiber Type	: 9/125 μ m	
Fiber Coating Color	: Colored	
Core Non-circularity	: $\leq 1\%$	IEC/EN 60793-1-20
Cladding Diameter	: 125.0 $\pm$ 0.7 μ m	IEC/EN 60793-1-20
Core/cladding Concentricity Error	: $\leq 0.6\mu$ m	IEC/EN 60793-1-20
Cladding Non-circularity	: $\leq 1.0\%$	IEC/EN 60793-1-20
Coating Diameter	: 245 $\pm$ 10 μ m	IEC/EN 60793-1-21
Coating/cladding Concentricity Error	: $\leq 12\mu$ m	IEC/EN 60793-1-20
Attenuation Co-efficient	: 1310nm $\leq$ 0.36dB/km	IEC/EN 60793-1-40
	: 1550nm $\leq$ 0.24dB/km	IEC/EN 60793-1-40
	: 1625nm $\leq$ 0.26dB/km	IEC/EN 60793-1-40
Zero dispersion slope	: ≤ 0.092 ps/(nm ² ·km)	
Zero dispersion wavelength	: 1300~1324nm	
Polarization mode dispersion	: ≤ 0.20 ps/ $\sqrt$ km	
Mode field diameter	: 1310nm : 9.0 $\pm$ 0.4 μ m	IEC/EN 60793-1-45
Cut-off wavelength (λ_c)	: 1260nm	IEC/EN 60793-1-44
Chromatic dispersion	: 1288~1339nm $\leq$ 3.5ps(nm·km)	IEC/EN 60793-1-42
	: 1550nm $\leq$ 18 ps/(nm·km)	IEC/EN 60793-1-42
	: 1625nm $\leq$ 22 ps/(nm·km)	IEC/EN 60793-1-42

Single Mode Outdoor Fiber Optic Cable (24F)

Environmental Specifications

Installation Temperature	:	-40°C~+60°C
Storage Temperature	:	-40°C~+70°C
Operating Temperature	:	-40°C~+70°C

Standard Compliances/Certifications

- RoHS Certified

Ordering Information

Product Code

53031-0024

Description

High Link Fiber Optic, Armored, Multi-loose Tube Outdoor Cable, Gel filled, 6F/T, CSM FRP, Single Sheath Black HDPE, SM, 24Cores